



SW2015

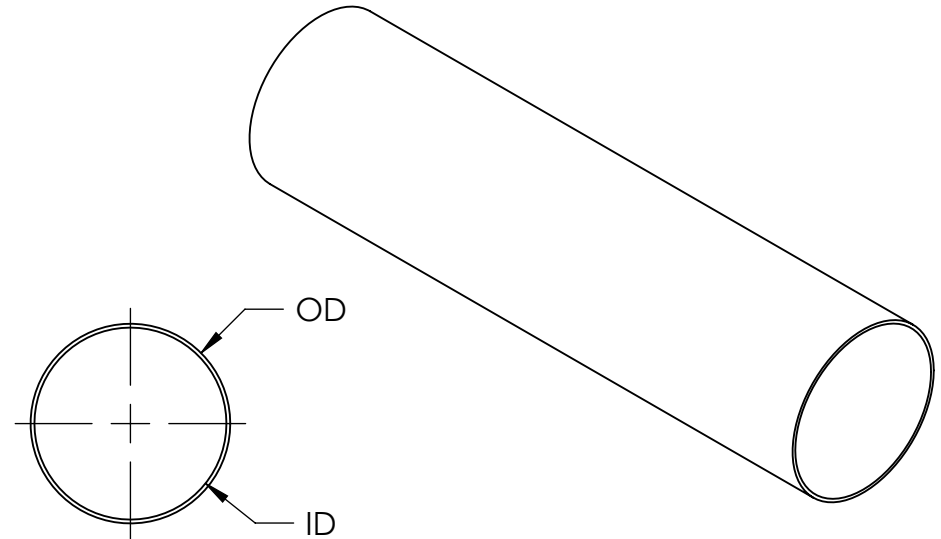

Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release	-	SEE ECN# 013695	GRW	1/26/2017	KAC	1/26/2017

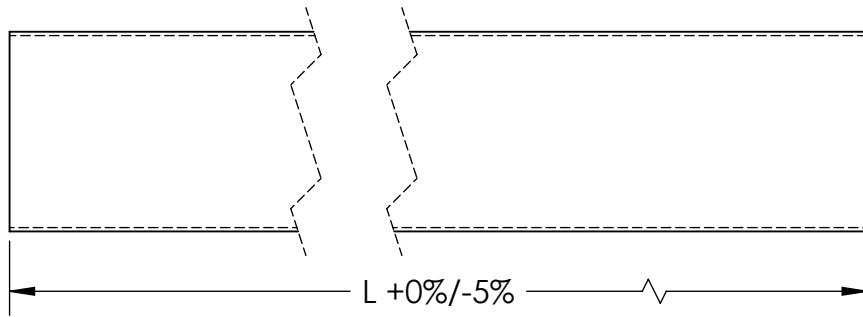

NOTES:

1. FLAMMABILITY UL94-V0
2. OPERATING TEMPERATURE -40°F TO 347°F (-40°C TO 175°C)
3. MELT POINT 392°F (200°C)
4. ABRASION PROTECTION HIGH
5. RECOMMENDED CUTTING SHEARS
6. EMI REQUIREMENTS 10 KHz TO 1 GHz ACCORDING TO CISPR25
7. RoHS
8. HF

NOMINAL SIZE	TYPE	OD	ID	EXPANSION RANGE (FOR REF ONLY)		L (FT)	WEIGHT (LBS)
				MINIMUM	MAXIMUM		
1/8	HEGEMIPV004	.175	.125	.16	.26	328	4.74
1/4	HEGEMIPV006	.30	.25	.2	.39	328	6.28
5/16	HEGEMIPV008	.3625	.3125	.32	.45	328	5.84
3/8	HEGEMIPV010	.38	.375	.32	.52	164	9.6
7/16	HEGEMIPV012	.4875	.4375	.39	.59	164	10.6
1/2	HEGEMIPV014	.55	.50	.47	.71	328	12.8
9/16	HEGEMIPV016	.6025	.5625	.55	.79	328	15.9
5/8	HEGEMIPV018	.630	.625	.63	.87	164	17.3
3/4	HEGEMIPV020	.80	.75	.71	.98	164	22.1

Material PET / TNCU	Units: inches	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	GRW	1/26/2017	Article/Type-No	HEGEMIPVO		Scale
	Dimension without tolerances details to: .xxxx = ±.0005 .xxx = ±.005 .xx = ±.01 .x = ±.03 None = ±.06 ∠ = ±0.5°		Approved	KAC	1/26/2017	Title	HELGAINE ELECTROMAGNETIC FLAME RETARDANT BRAIDED SLEEVING		Project Number
	Dimension Formatted in [mm]		 North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase		Format
						17-0424-001-CSU		Sheet	1/1